


WIRE CLAMP BRACKET FOR STD. CONNECTOR

Application:

Wire clamp bracket will provide optimum strain relief. Construction allows a large difference in maximum and minimum wire diameter. Compact version designed especially to be used with small wire diameters.

Construction

- All stainless steel, includes stainless steel screws

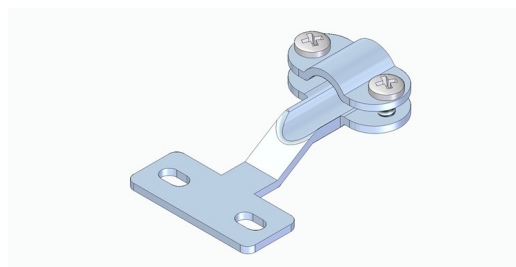

Order Code	
Bracket Part#	For Connector Series
BKT-WC-1-SC	SC,SCH,SCU,SCQ
BKT-WC-2-SC	Ceramic Series SCC
BKT-WC-3-SC	Duplex Series SCD
BKT-WC-4-SC	Ceramic Series SCCQ

PROTECTION BOOT FOR STD. CONNECTOR

Application

The two flexible silicone rubber boots will cover the connector set snugly and prevent moisture, water and dirt entering the connector.

Temperature Rating: 200 °C / 300 °C

Construction

- Silicone cover with retention ring prevent disconnection due to vibration.
- Tapered entrance hole to ensure proper sealing on most cable diameters.

Order Code

Part#	Description
BT-SC-2	For 2 Pin Connector
BT-SC-3	For 3 Pin Connector

