

HHRTD-1 Handheld Industrial Meat Probe Resistance Temperature Detector with Stainless Steel Handle

TEMPERATURE SENSOR

HHRTD- 1 : Hand Held RTD with stainless steel handle specifically designed for measuring the temperature inside meat or similar food products. It uses an RTD (Resistance Temperature Detector) element, which is highly accurate and stable, to provide precise temperature readings. These probes are commonly used in food processing, cooking, or quality control environments where it is essential to monitor the internal temperature of meat for safety and quality reasons.

Key Features

- Sharp tip for easy Penetration into the meat or other similar foods.
- FDA Approved 316 SS material to use in direct contact with food.
- Available in type Pt100, Pt1000.
- Available in Class B, Class A (IEC 60751& ASTM E1137)
- Single and Duplex Sensor elements.
- Range -50°C to 260°C (-58°F to +500 °F)

Technical Specification


Insulation Resistance : 1000 MG Ohms @ 500 vdc
Response Time : <5 Sec in circulating water @ 1ft/sec
Accuracy : As per IEC60751 (See tolerance chart)
Self Heating Error: < 0.30°F (0.17°C)
Time Constant : < 5 sec

RTD Wire Configuration

2 Wire: In 2 wire RTDs, one lead wire is connected to each wire of the RTD element. 2 Wire RTDs are an economical option for the applications where high accuracy is not required. Since there is no compensation wire, the accuracy of RTD can be affected if long lead wire is used.

3 Wire : 3 wire RTDs are the most common type of RTDs used in the industry. In 3 three-wire Rtd 1 wire is connected to the one side of the RTD element, and on the other side, 2 wires are connected to compensate for the resistance. With compensating wire, accuracy is very close to the element accuracy at the termination end.

4 wire: 4 wire RTDs are highly accurate. In 4 wire RTDs 2 wires are connected to each side of the RTD element. With additional wire on each side of the RTD element, the output at the termination is highly accurate. 4 wire RTDs are recommended where high accuracy and long lead wire is required.

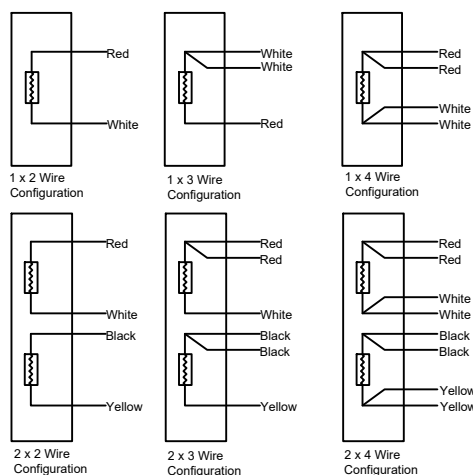

RTD Type Available

Element Type	Pt100	Pt200	Pt1000	Ni120
Wire Wound	X	X		
Thin Film	X		X	X
Alpha Value	IEC 0.00385 JIS 0.00391	IEC 0.00385 JIS 0.00391	IEC 0.00385	0.00672


Our RTD class offerings and Tolerance as per IEC60751 (pt100)

Tolerance Class	Temperature Range °C		Tolerance	Tolerance
	Wire Wound	Thin Film	Values Ω	values °C
AA	-50 TO +250	0 TO +150	±0.04	± (0.1 + 0.0017 t)
A	-100 TO +450	-30 TO +300	±0.06	± (0.15 + 0.002 t)
B	-196 TO +600	-50 TO +500	±0.12	± (0.3 + 0.005 t)
C	-196 TO +600	-50 TO +600	±0.23	± (0.6 + 0.01 t)
a t = modulus of temperature in °C without regard to sign				
For 1/10 DIN B RTD is not standardize. The only accuracy defined is 1/10 of Class B accuracy at 0°C = 0.03°C				


Tolerance Chart pt100 (IEC60751)

Temperature	Class B±	Class A±	Class AA± (1/3 DIN B)	Class 1/10 DIN B±
-50° C	0.55	0.25	0.19	0.060
0° C	0.30	0.15	0.10	0.030
100° C	0.80	0.35	0.27	0.070
200° C	1.30	0.55	0.44	0.120
250° C	1.55	0.65	0.53	0.160
300° C	1.80	0.75	0.61	0.220
350° C	2.05	0.85	0.70	-
400° C	2.30	0.95	0.78	-
450° C	2.55	1.05	0.87	-
500° C	2.80	1.15	0.95	-
550° C	3.05	1.25	1.04	-
600° C	3.30	1.35	1.12	-
650° C	3.55	1.45	1.21	-

WITH FLANGE

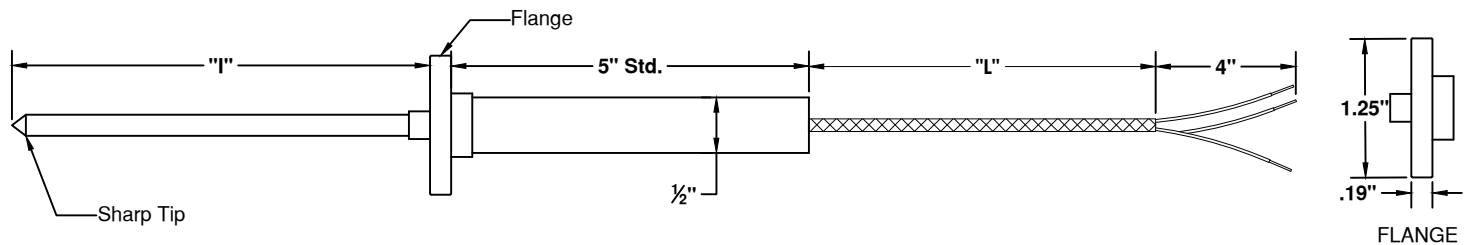

WITHOUT FLANGE

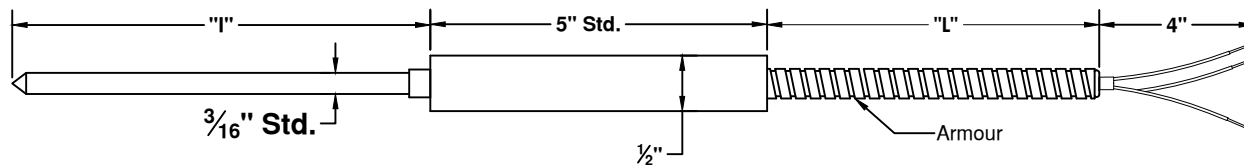

	1	2	3	4	5	6	7	8	9	10	11	12	13
HHRTD1													

For Example- HHRTD1-01-A-S-03-3-01-6i-120i-5X-Z-0-0

1. RTD TYPE	
CODE	
01	Pt100 Ohm, 0.00385, Coefficient
04	Pt1000 Ohm, 0.00385 Coefficient

2. RTD ACCURACY	
CODE	
B	Class "B"
A	Class "A"

3. SENSOR ELEMENT	
CODE	
S	Single
D	Dual

4. WIRE CONFIGURATION	
CODE	
02	2 wire
03	3 wire
04	4 wire
06	Dual 6wire
08	Dual 8 wire

5. SHEATH OD		
CODE	IMPERIAL SIZE	METRIC SIZE
3	3/16"	4.76 mm

6. SHEATH MAT.	
CODE	
8	SS316

7. HANDLE STYLE	
CODE	
0	Handle without Flange
FL	Handle with Flange

8. IMMERSION LENGTH (I)	
Immersion length - use "I" for inches and "M" for millimetre	

9. LEAD LENGTH (L)	
Lead length - use "I" for inches and "M" for millimetre	

10. WIRE TYPE	
CODE	
6	TEFLON (260° C)
NOTE:- Add "O" for no jacketing. Add "X" for SS braiding & "Z" for Armor	

11. CODES FOR TERMINATION	
CODE	
Z	Bare ends
TPP	3 Pin Standard Plug
MTPP	Miniature 3 Pin Plug
FPP	4 Pin Standard Plug

12. CODES FOR TERMINATION (JACK)	
CODE	
0	Not Required
TPJ	3 Pin Standard Jack
MTPJ	Miniature 3 Pin Jack
FPJ	4 Pin Standard Jack

13. OPTIONAL ACCESSORY	
CODE	
0	Not required
WC	Wire clamp
Only choose when ordering with connector	

Termination options-

