

**RTD71-** RTD 71 is a highly accurate industrial temperature sensor with an adjustable connection designed for flexible installation in various industrial processes. It typically features an adjustable fitting, such as a compression fitting or sliding gland, allowing for precise positioning within the application. This adaptability makes it ideal for environments where insertion depth, mounting location, or process conditions may vary.

### Key Features

- Uses connection head to protect the electrical connections from environmental factors such as moisture, dust, and mechanical damage.
- Connection head usually made of aluminum, stainless steel or plastic and available in weatherproof, explosion-proof or corrosion-resistant designs.
- Connection head contains terminals or 4-20mA output temperature transmitter for signal conditioning.
- Available with Pt100 or Pt1000 elements per IEC 60751 standard in Class A or Class B accuracy ratings.
- Available in 2-wire, 3-wire, or 4-wire configurations for enhanced accuracy and reduced lead wire resistance errors.
- Available in 304, 316, or 316L stainless steel for corrosion resistance and sheath diameters range from 3mm to 12mm (custom sizes available).

### Technical Specification

Insulation Resistance : 100 MG Ohms @ 250 vdc

Response Time : <5 Sec in circulating water @ 3ft/sec

Accuracy : As per IEC60751 (See tolerance chart)

Self Heating Error: < 0.30°F (0.17°C)



Time Constant : < 5 sec

### RTD Wire Configuration

**2 Wire:** In 2 wire RTDs, one lead wire is connected to each wire of the RTD element. 2 Wire RTDs are an economical option for the applications where high accuracy is not required. Since there is no compensation wire, the accuracy of RTD can be affected if long lead wire is used.

**3 Wire :** 3 wire RTDs are the most common type of RTDs used in the industry. In 3 three-wire Rtd 1 wire is connected to the one side of the RTD element, and on the other side, 2 wires are connected to compensate for the resistance. With compensating wire, accuracy is very close to the element accuracy at the termination end.

**4 wire:** 4 wire RTDs are highly accurate. In 4 wire RTDs 2 wires are connected to each side of the RTD element. With additional wire on each side of the RTD element, the output at the termination is highly accurate. 4 wire RTDs are recommended where high accuracy and long lead wire is required.

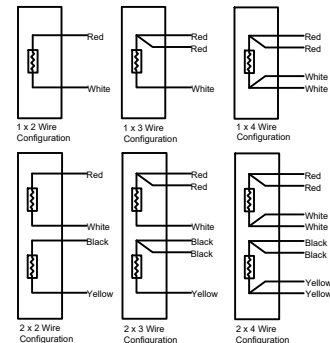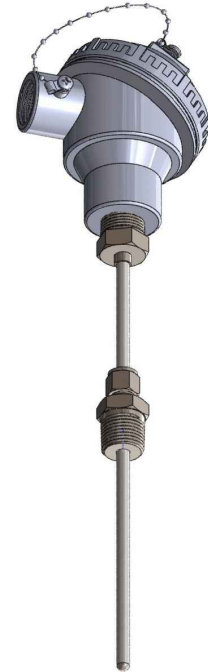

RTD Type Available				
Element Type	Pt100	Pt200	Pt1000	Ni120
Wire Wound	X	X		
Thin Film	X		X	X
Alpha Value	IEC 0.00385 JIS 0.00391	IEC 0.00385 JIS 0.00391	IEC 0.00385	0.00672


### Our RTD class offerings and Tolerance as per IEC60751 (pt100)

Tolerance Class	Temperature Range °C		Tolerance Values Ω	Tolerance values °C
	Wire Wound	Thin Film		
AA	-50 TO +250	0 TO +150	±0.04	± ( 0.1 + 0.0017  t  )
A	-100 TO +450	-30 TO +300	±0.06	± ( 0.15 + 0.002  t  )
B	-196 TO +600	-50 TO +500	±0.12	± ( 0.3 + 0.005  t  )
C	-196 TO +600	-50 TO +600	±0.23	± ( 0.6 + 0.01  t  )
a   t   = modulus of temperature in °C without regard to sign				
For 1/10 DIN B RTD is not standardize. The only accuracy defined is 1/10 of Class B accuracy at 0°C = 0.03°C				

Temperature	Class B±	Class A±	Class AA± (1/3 DIN B)	Class 1/10 DIN B±
-50° C	0.55	0.25	0.19	0.060
0° C	0.30	0.15	0.10	0.030
100° C	0.80	0.35	0.27	0.070
200° C	1.30	0.55	0.44	0.120
250° C	1.55	0.65	0.53	0.160
300° C	1.80	0.75	0.61	0.220
350° C	2.05	0.85	0.70	-
400° C	2.30	0.95	0.78	-
450° C	2.55	1.05	0.87	-
500° C	2.80	1.15	0.95	-
550° C	3.05	1.25	1.04	-
600° C	3.30	1.35	1.12	-
650° C	3.55	1.45	1.21	-

**Common Applications**


- Used in chemical, petrochemical, and oil & gas industries for monitoring and controlling process temperatures.
- Ideal for motors, bearings, hydraulic systems, and compressors where depth adjustment is required.
- Ensures proper temperature control in cooking, sterilization, and storage tanks in food and beverage manufacturing.
- Monitors temperature in boilers, heat exchangers and cooling systems in power generation and HVAC systems.
- Used in pipelines and treatment tanks to monitor temperature changes in wastewater treatment.

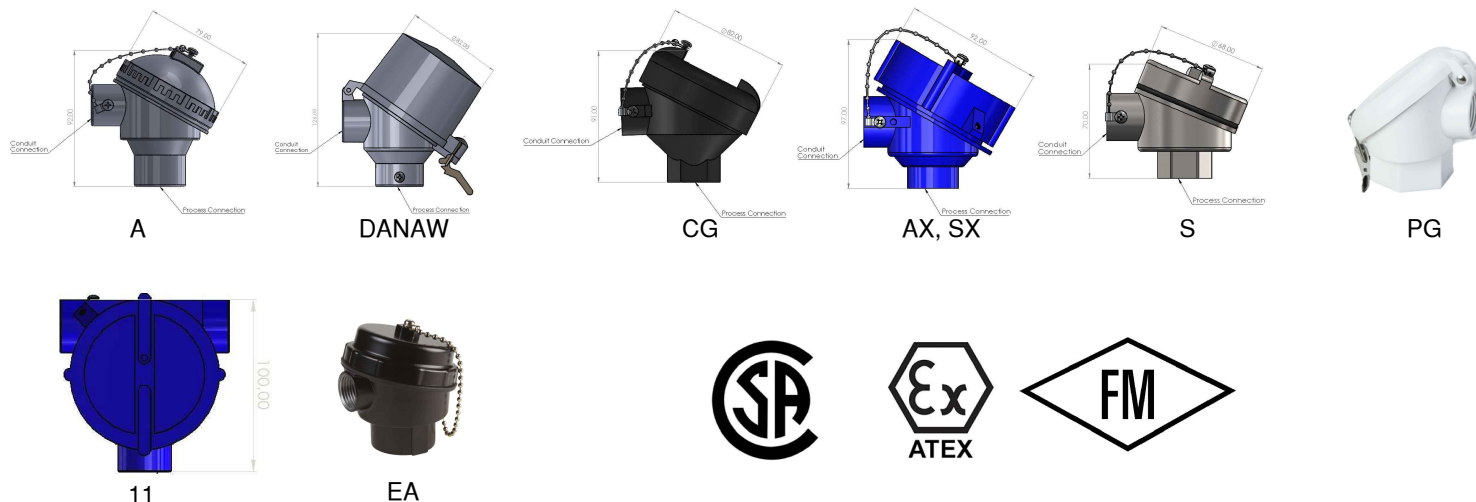**Connection Heads****Transmitters and Displays**

Model	TT-167	TT-267	TT-367	TT-467	TT-567
<b>Transmitter</b>					
<b>Output</b>					
4-20 mA	X	X	X	X	X
HART® Protocol		X	X	X	X
<b>Input</b>					
Thermocouple	K,J,R,S,T,N,E,B, Pt100, Pt1000	K,J,R,S,T,N,E,B, Pt100, Pt1000	K,J,R,S,T,N,E,B, Pt100, Pt1000	K,J,R,S,T,N,E,B, Pt100, Pt1000	K,J,R,S,T,N,E,B, Pt100, Pt1000
<b>Approval</b>					
Electrical		CE, CSA	CE, CSA	CE, CSA	CE, CSA
HazLoc		OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL
<b>Integral Display</b>			X	X	X
<b>Field Programmable</b>		X	X	X	X

**Thermowell Options**

<b>Thermowell</b>					
	Flanged Helical Thermowell	Flanged Thermowell	Socket Weld Thermowell	Threaded Thermowell	Metal Protection Tubes
<b>MODELS</b>	TF, TF-H	TF	SWT01, SWT02, SWT03	TWS01, TWS02, TWS03	PT
	Vanstone Thermowell	Weld in Themowell	Tri-Clamp Thermowell		
<b>MODELS</b>	TWW-02, TWW-03	TWT-W	TCT-01, TCT-02, TCT-03, TCT-04		

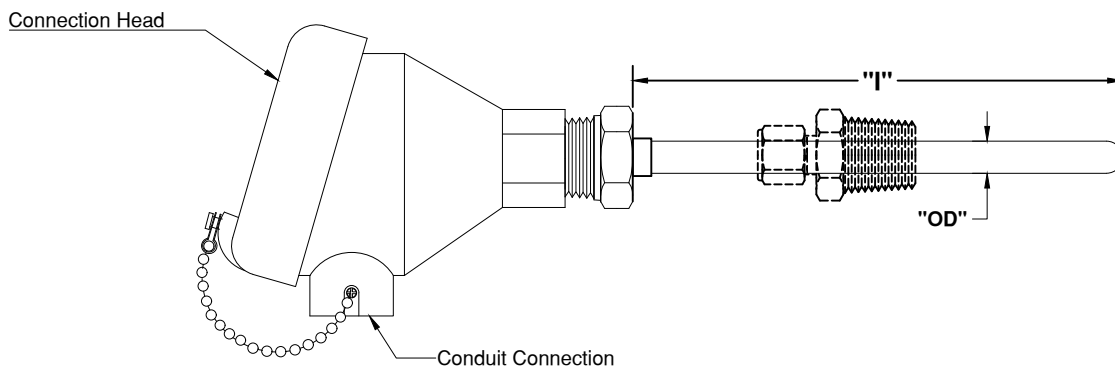

	1	2	3	4	5	6	7	8	9	10	11	12
RTD71												

For Example- RTD71-01-A-S-03-LT-4-8-6i-A-07-S4N-TB

1. RTD TYPE	
CODE	
01	Pt100 Ohm, 0.00385, Coefficient
02	Pt100 Ohm, 0.00392, Coefficient
03	Pt200 Ohm, 0.00385, Coefficient
04	Pt1000 Ohm, 0.00385 Coefficient
05	Ni120 Ohm, 0.00672 Curve Class B Only (Only Available in Low temp)

2. RTD ACCURACY	
CODE	
B	Class "B"
A	Class "A"
AA	Class "AA" (Available only for RTD type 01,02)
1/10	Class 1/10 DIN B (Available only for RTD type 01,02)

3. SENSOR ELEMENT	
CODE	
S	Single
D	Dual

4. WIRE CONFIGURATION	
CODE	
02	2- Wire
03	3- Wire
04	4- Wire
06	Dual 6- Wire
08	Dual 8- Wire

5. TEMPERATURE RANGE	
CODE	
LT	-50°C to 250°C, Thin Film
MT	-50°C to 485°C, Thin Film
HT	-196°C to 600°C, Wire Wound
UT	-196°C to 700°C, Wire Wound

6. SHEATH OD		
CODE	IMPERIAL SIZE	METRIC SIZE
2	1/8"	3.2 mm
3	3/16"	4.76 mm
4	1/4"	6.35 mm

6. SHEATH OD		
5	5/16"	7.9mm
6	3/8"	9.5 mm
7	0.215"	5.46 mm
2M	0.079	3.0mm
3M	0.197"	5.0mm
4M	0.236"	6.0 mm
5M	0.315"	8.0mm
6M	0.354"	9.0 mm
7M	0.394"	10.0 mm

7. SHEATH MAT.	
CODE	
8	SS 316
4	SS 310
9	SS 304
6	SS 321

8. IMMERSION LENGTH (I)	
Immersion length - use "I" for inches and "M" for millimetre	

9. CONNECTION HEAD	
CODE	
A	Gen purpose Aluminum head IP68
EA	Economical Aluminum gen purpose head(non-rated)
S	SS general purpose
CG	Cast iron
PG	Polypropylene
SX	SS Explosion proof
AX	Aluminum explosion proof (CSA,FM,ATEX,IECE'x approved)
06	"Fieldmount Temp Transmitter w/ Display Aluminum"
07	"Fieldmount Temp Transmitter w/ Display SS"
06X	"Exd Fieldmount Temp Transmitter w/ Display Aluminum"
07X	"Exd Fieldmount Temp Transmitter w/ Display SS"
09	General Purpose Transmitter w/ Loop Powered Indicator
10	Aluminum connection head (CCOE approved)
DA	Dual entry gen purpose Aluminum head

9. CONNECTION HEAD	
D-XD	Dual entry Aluminum explosion proof (CSA,FM,ATEX,IECE'x approved)

10. CONDUIT CONNECTION	
CODE	
05	1/2" NPT
07	3/4" NPT
2M	M20 X 1.5

11. PROCESS FITTING	
CODE	
0	Not Required
11-1. MATERIAL	
S	Stainless Steel
B	Brass
M	Mild Steel
11-2. SIZE	
2	1/8"
4	1/4"
6	3/8"
8	1/2"
18	M18 X 1.5
20	M20 X 1.5
11-3. THREAD TYPE	
N	NPT
B	BSP
Leave blank for metric thread	
11-4. FERRULE MATERIAL	
Leave Blank for SS	
T	Teflon

12. HEAD TERMINATION	
CODE	
OO	Blank Head Ready to Install Transmitter
TB	Ceramic Terminal Block
TRM	Standard 4-20 mA Transmitter
TRM-H	Standard 4-20 mA Transmitter w/ Hart